

Patch fiting

Products Catalog 玻璃门夹产品目录

JINCHENG HARDWARE INDUSTRY CO., LTD

Add: No.191, Wudong Industrial Zone, Lile Town, Jianghai Dist, Jiangmen, Guandong, China **Tel:** +86-750-3466208 **Fax:** +86-750-3166206 **E-mail:** sales@jincheng-hw.cc http://www.jincheng-hw.cc

江门市金承五金制品有限公司 地址:广东省江门市江海区礼乐武东工业区191号 **电话:**+86-750-3466208 传真:+86-750-3166206 **电子邮箱:**sales@jincheng-hw.cc http://www.jincheng-hw.cc









http://www.jincheng-hw.cc



About us


JinCheng Hardware Industry Co.,Ltd is a manufacturer and supplier of architectural hardware to the construction industry,is located at Jiangmen city,Guangdong province in China Near HK and Macao.JinCheng products are both durable and versatile.

The JinCheng quality range of Architectural Hardware includes door hinges,Door Lever handles,pull handles,door stoppers,series of doorused hardware and small size metal components,etc.

Our focus on customers service, high quality and competitive price, which leading our goods are popular in America, Cananda, Europe, Southeast. Asia, Middle-East and other countries abroad.

JinCheng's extensive range of Architectural Hardware products offers a well-priced package of functionality and style.Please feel free to contect JinCheng should you have any special requirements or if you would like one of our Architectural Consulrants to call on you. We look forward to helping you and thank you for you interest and support.




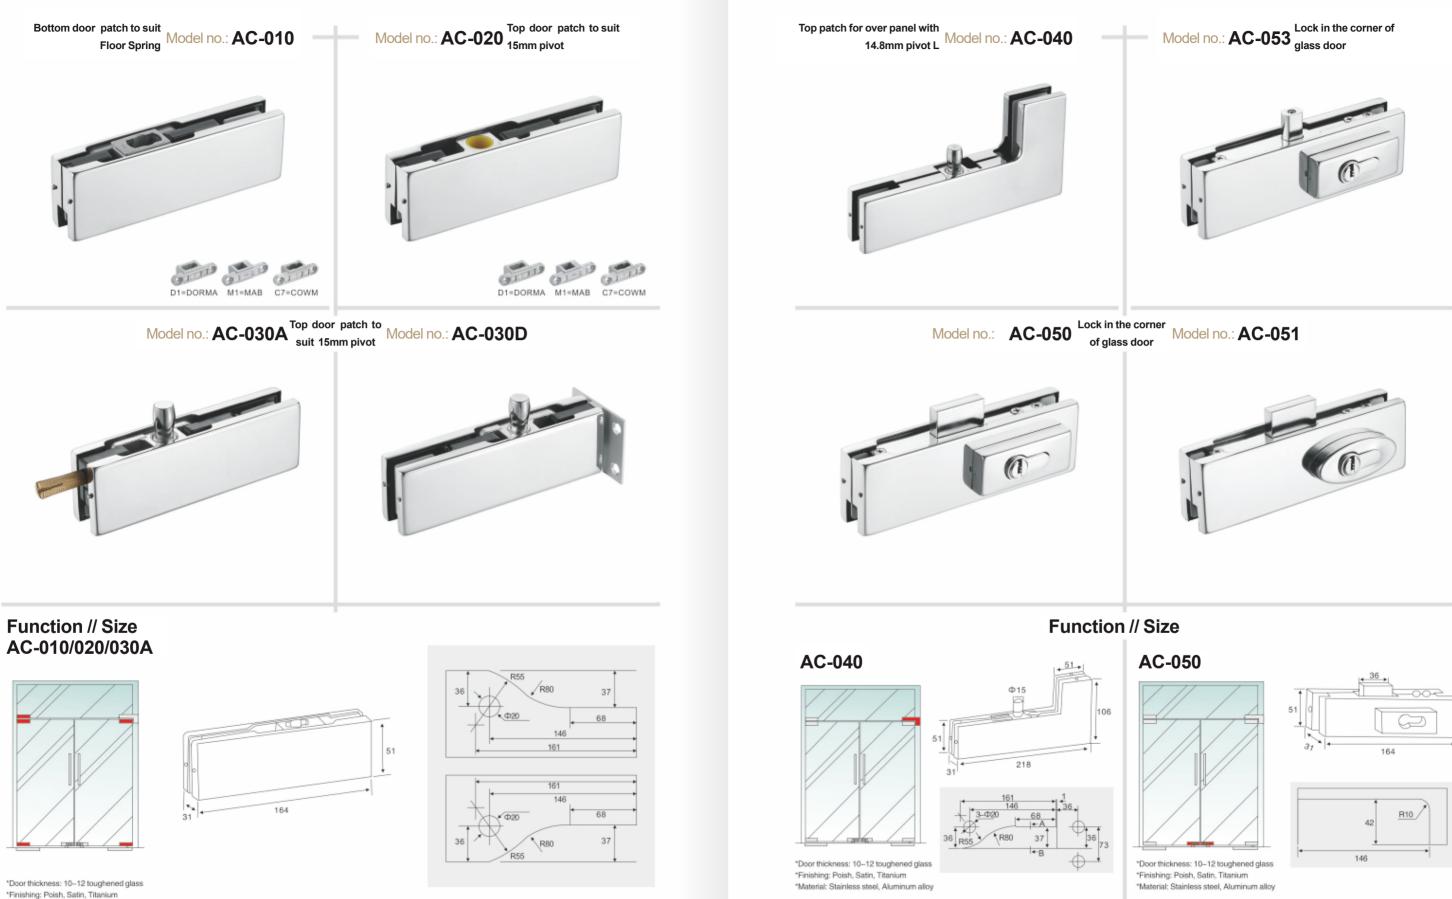

*Material: Stainless steel, Aluminum alloy





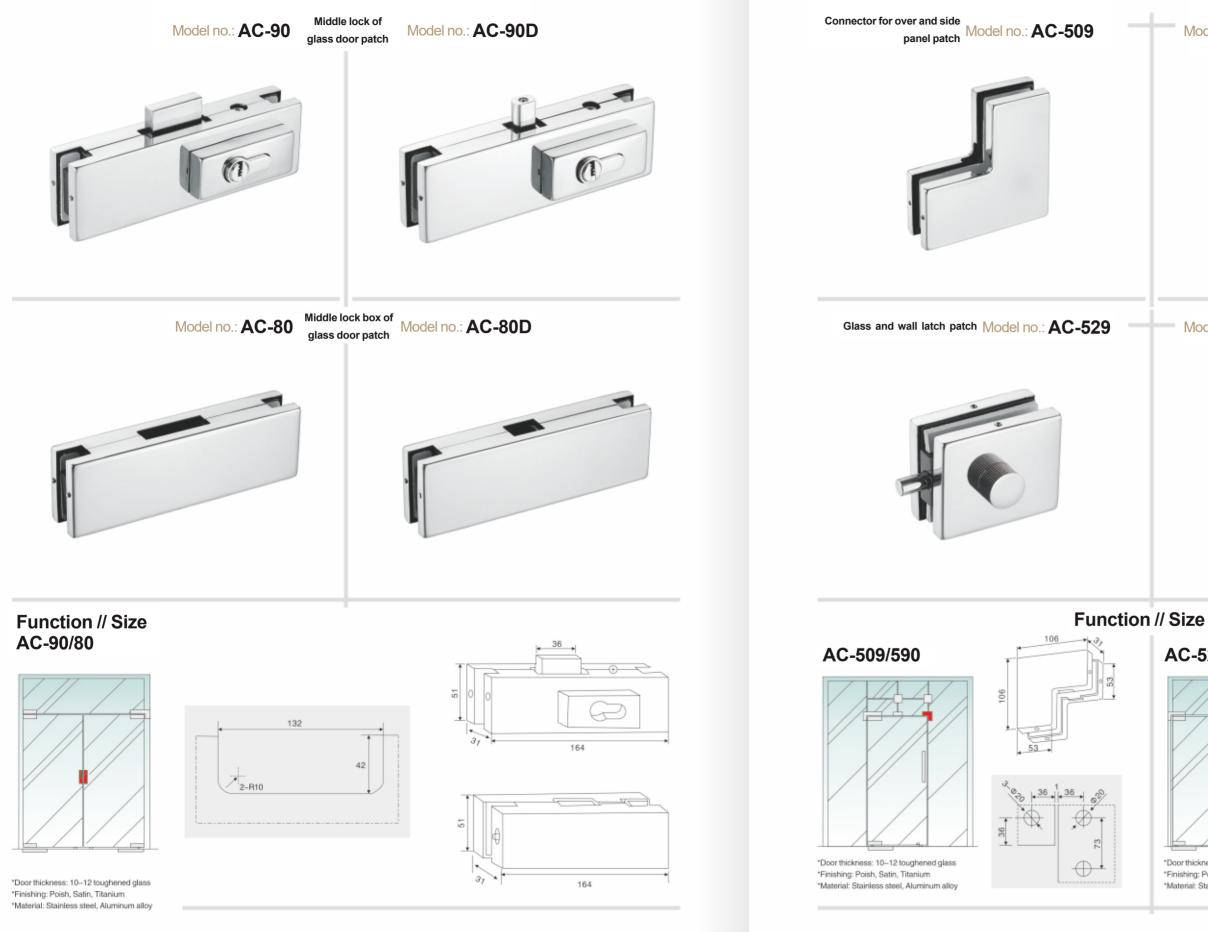




Model no.: AC-590 Connector for over panel and side panel with stop




Model no.: AC-539 Glass and glass latch box patch






*Door thickness: 10–12 toughened glass *Finishing: Poish, Satin, Titanium *Material: Stainless steel, Aluminum alloy







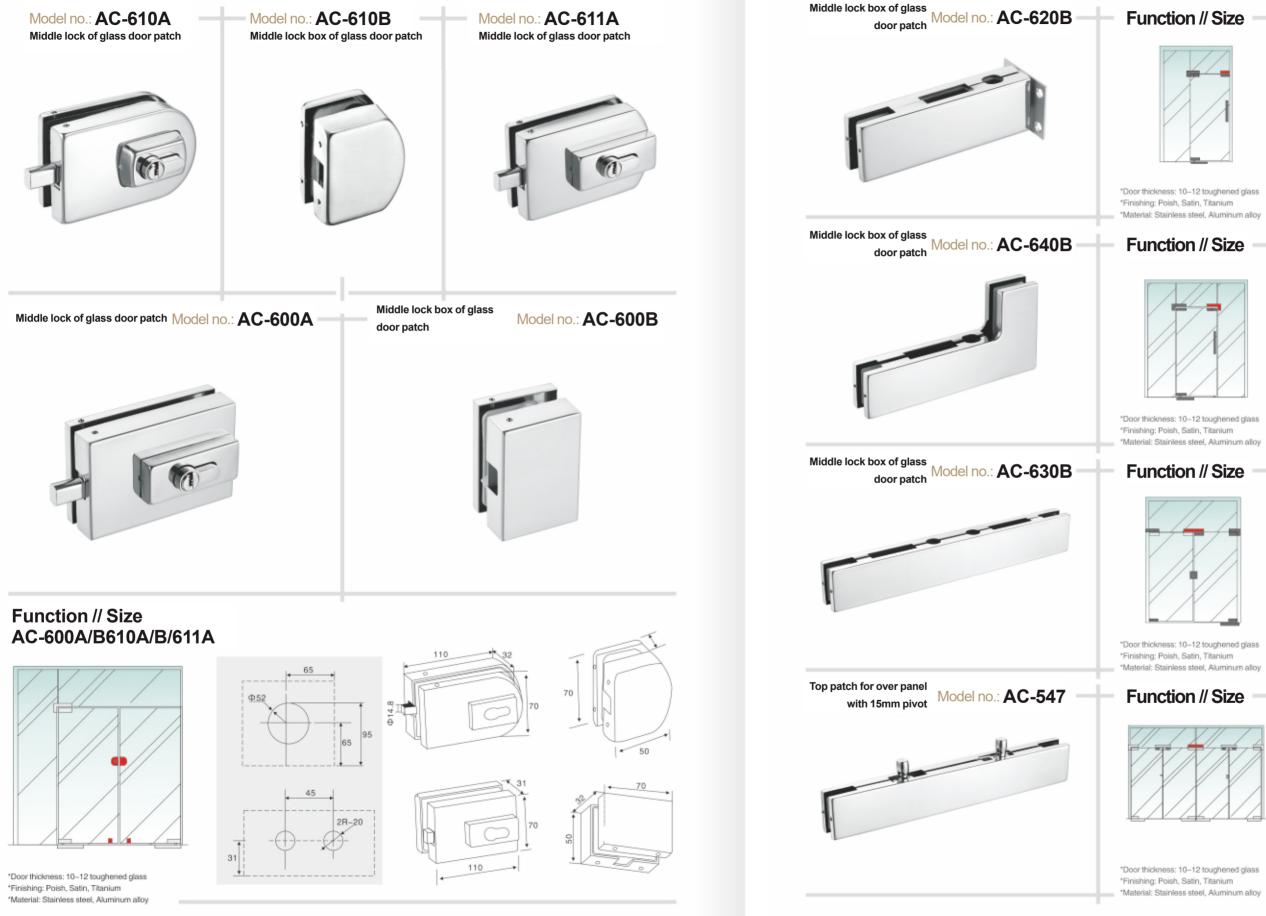






















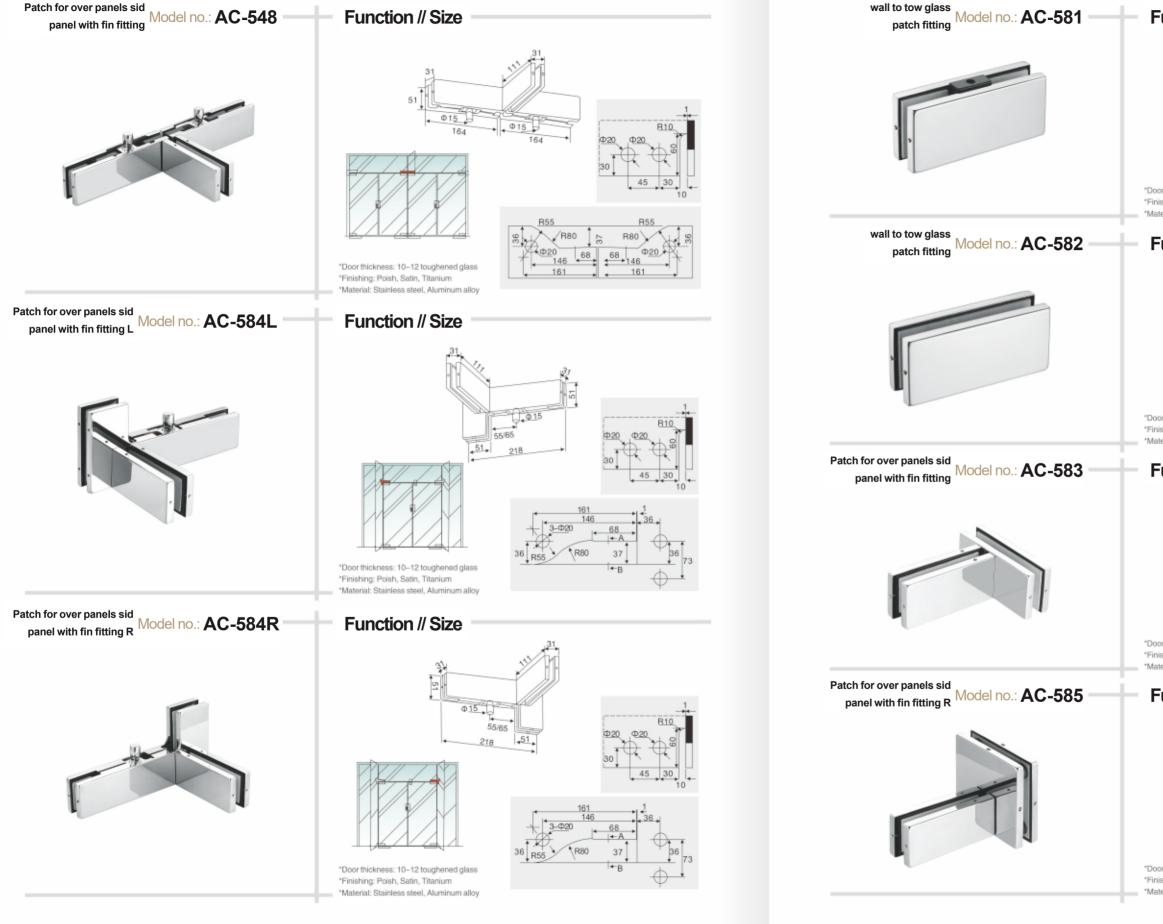




Function // Size




*Door thickness: 10–12 toughened glass *Finishing: Poish, Satin, Titanium *Material: Stainless steel, Aluminum alloy

Function // Size



*Door thickness: 10–12 loughened glass *Finishing: Poish, Satin, Titanium *Material: Stainless steel, Aluminum alloy

Function // Size





*Door thickness: 10–12 toughened glass *Finishing: Poish, Satin, Titanium *Material: Stainless steel, Aluminum alloy


Function // Size





*Door thickness: 10–12 toughened glass *Finishing: Poish, Satin, Titanium *Material: Stainless steel, Aluminum alloy














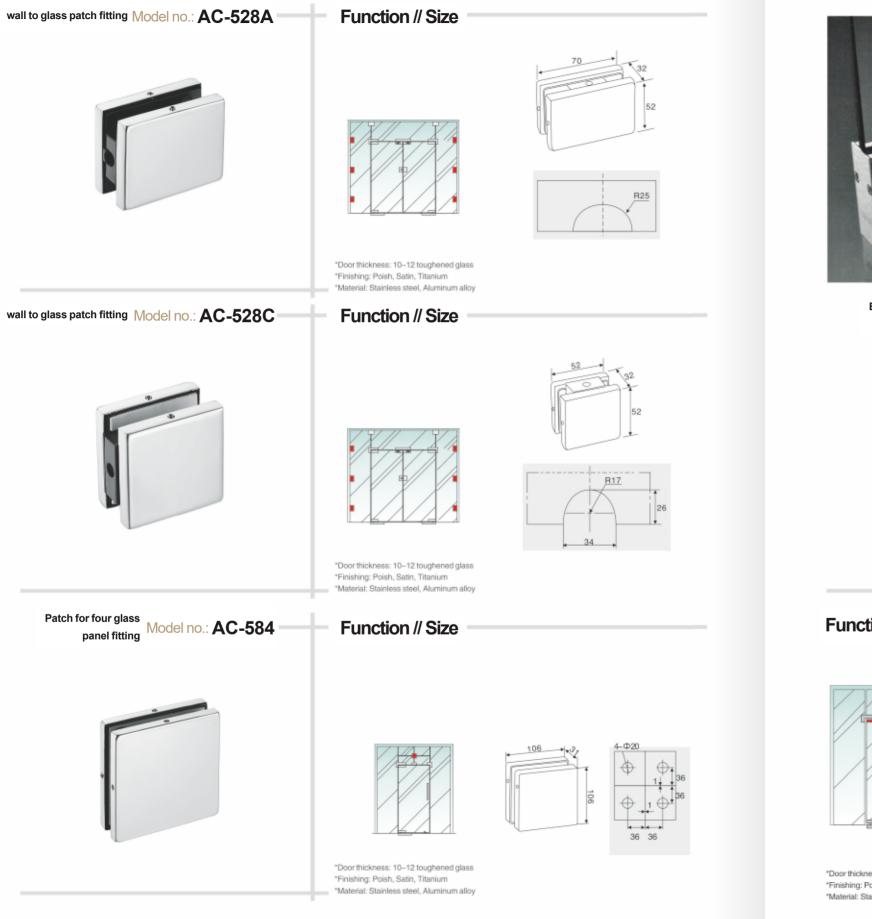




Bottom door patch to suit Floor Spring



Function // Size




*Door thickness: 10-12 toughened glass *Finishing: Poish, Satin, Titanium *Material: Stainless steel, Aluminum alloy



Model no.: YC-200 Model no.: YC-500 Lock Bottom Floor Spring Lock Bottom door patch to suit









Committed to the field of door locks, becoming a leading provider of door lock solutions, meeting the needs of end users for property, personalsafety and convenience, andenjoyingaesthetic enjoyment. Reassure consumers that they rely on advanced equipment, industry leading product development and design, and rigorous scientific management to provide consumers with first-class quality, stylish and superior products; and through comprehensive pre-5ales, sales, and after-5ales service, Consumers who buy products are assured.





Function // Size




*Door thickness: 10–12 toughened glass *Finishing: Poish, Satin, Titanium *Material: Stainless steel, Aluminum alloy

Function // Size



*Door thickness: 10–12 loughened glass *Finishing: Poish, Satin, Titanium *Material: Stainless steel, Aluminum alloy

Function // Size



*Door thickness: 10–12 toughened glass *Finishing: Poish, Satin, Titanium *Material: Stainless steel, Aluminum alloy

Function // Size



*Door thickness: 10–12 toughened glass *Finishing: Poish, Satin, Titanium *Material: Stainless steel, Aluminum alloy

